




teco

PRODUCT DESCRIPTION

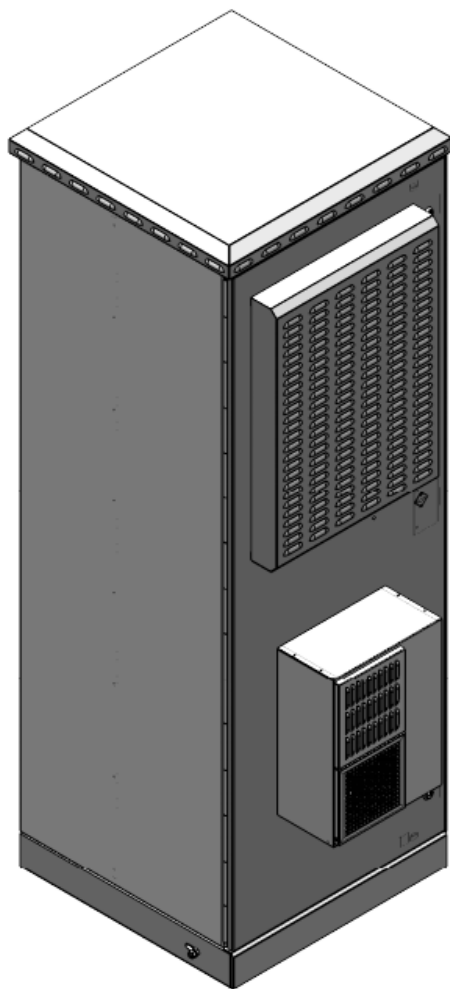

**OUTDOOR
FLOOR STANDING
CABINET**

Model: **NF-F – G.15.70.70.40U.2/3.1340VeDC/04AC**


Art. **TEKO 1151.00.00.000**

TECO OUTDOOR FLOOR STANDING CABINET

Outdoor floor standing cabinet «**NF-F – G.15.70.70.40U.2/3.1340VeDC/04AC**» - is universal cabinet with two compartment. Equipment tray with DC air ventilation and AC heater and battery tray with AC air conditioner with cooling capacity 400W. Unique design and wide range of climate control solutions allows operating in harsh environments with a temperature range -40C - + 55C. This cabinet are simple in setup and installation.

Outdoor cabinet NF-F – G.15.70.70.40U.2/3.1340VeDC/04AC benefits:

	■ Cabinet dimensions 2100×700×700 H×W×D ■ 15U front and rear vertical 19” racks for the equipment mounting. ■ Battery shelves 24U (3 pcs × 8U) ■ Type of walls – sandwich-panel, thickness of insulation – 50 mm. ■ Anti-Vandal case.
Material	■ Walls – galvanized steel, thickness 1,5 mm.
Door	■ One door. ■ Door opening angle — not more 130°. ■ Locking system — three-point (one-point and two, five-crossbar locking system), rotating handle.
Coating	■ Semi-textured outdoor powder-coat paint RAL 7035, 10 years warranty.
Temperature conditions	■ -40°C to +55°C.
Cooling system	■ Ventilation 48 VDC and heater 220 VAC ■ Air conditioner TAIC400 AC
Protection rating	■ IP 55.
Shipment method:	Assembled

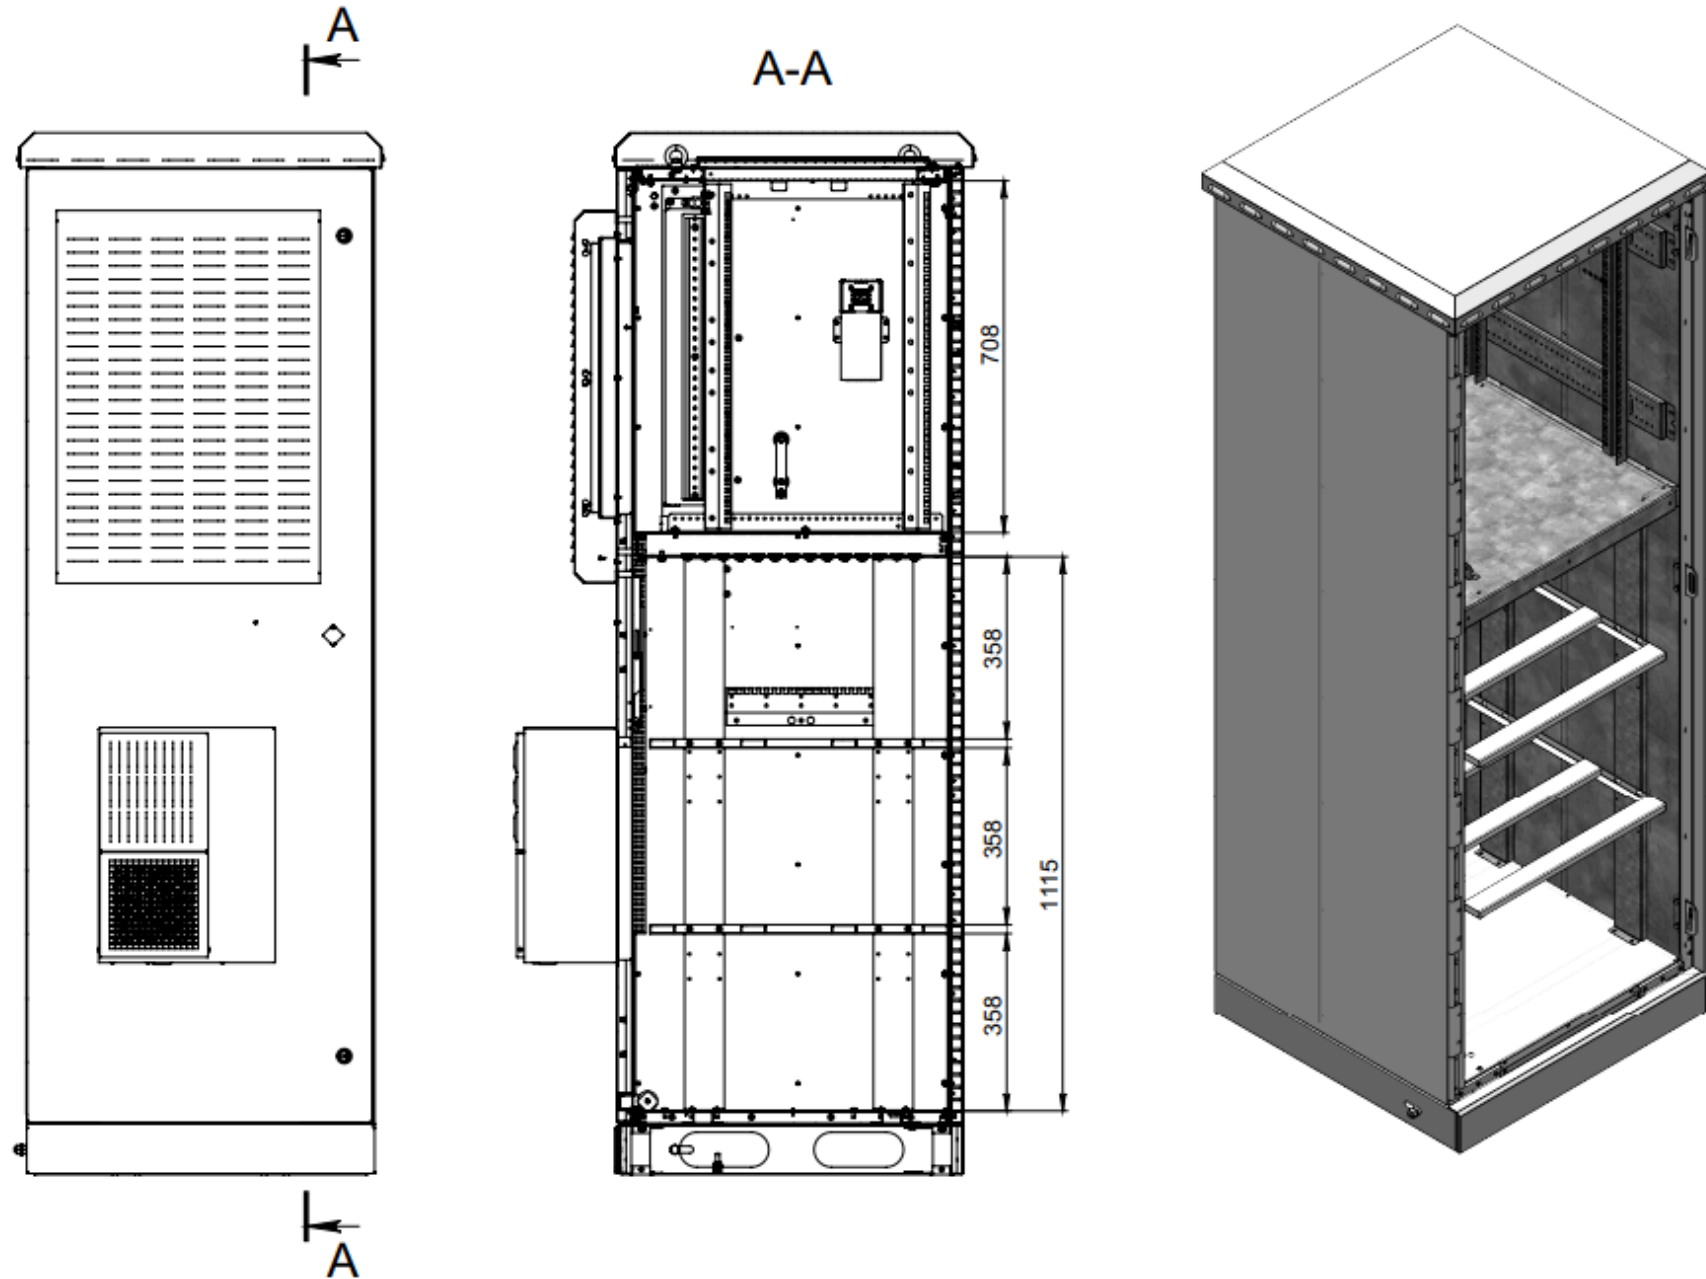

Total		
Dimensions, Height × Width × Depth	mm	2100×700×700
Degree of protection	IP	55
Voltage	V	380V AC 50-60 Hz/48V DC
Door	pcs	1
Lock	pcs	1
Socle	pcs	1
Roof	pcs	1
Insulation	Type	Mineral wool
Thickness of insulation	mm	50
Cooling system		
Ventilation	set	1
Control unit	-	Controller DMC
Rated voltage	V	48 DC
Rated current of one fan	A	1,2
Air flow of one fan	m ³ /h	520
Air conditioner TAIC400 AC	pcs	1
Rated voltage	V	220 AC
Rated current	A	1
Cooling capacity	W	400
Noise level 1/2/3 m	dB	60/58/56
AC heater	pcs	1
Control unit	-	Controller DMC
Rated voltage	V	220 AC
Heating capacity	W	400

Equipment

19" rail for power supply and customer's equipment	set	1
SPD class II 4P	pcs	1
MCB 32A 3P	pcs	1
MCB 25A 1P	pcs	3
MCB 6A 1P	pcs	2
MCB 2A 1P	pcs	2
Service light LED 48V	pcs	1
RCD 16A, 30mA	pcs	1
Service socket 16A	pcs	1
Temperature sensor	pcs	2
Smoke detector	pcs	1
Door switch	pcs	1
Dry contact block (LSA-profile)	pcs	1
Battery shelf 8U	pcs	3
Cable entries from bottom	Type x pcs	1

Other information

Application	-	Outdoor
Mounting Method	-	Floor

teco

📍 Zaliutynska Str., 10, Kharkiv, Ukraine, 61177

☎ tel. +38 (057) 341-45-41
tel. +38 (057) 372-10-42
fax +38 (057) 341-60-30

🌐 teco-ua.com

✉ info@teco-ua.com