




teco

PRODUCT DESCRIPTION

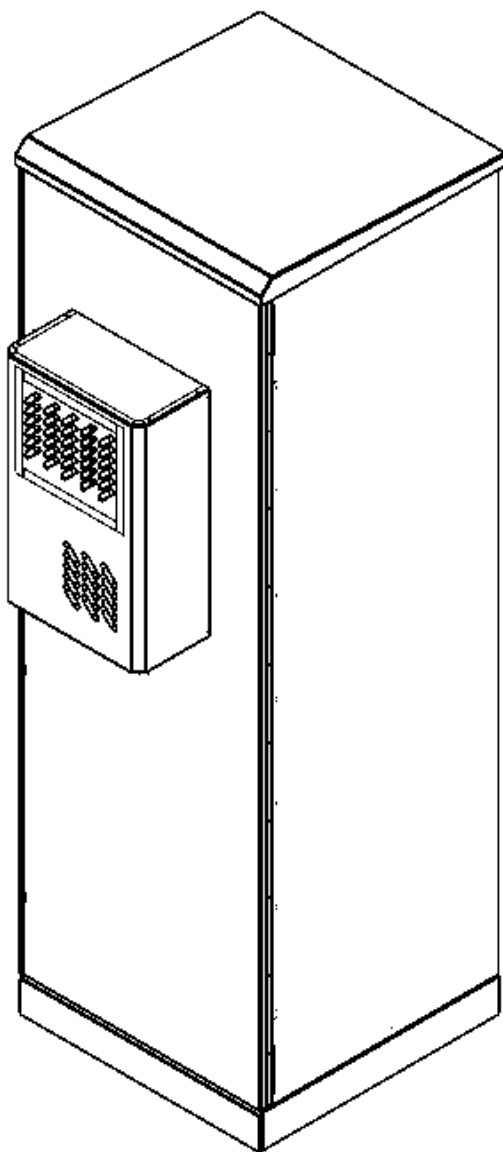

**OUTDOOR
FLOOR STANDING
CABINET**

Model: **NF-F – G.15.70.70.44U.1/0.06DC**

Art. **TEKO 1164.00.00.000**


TECO OUTDOOR FLOOR STANDING CABINET

Outdoor floor standing cabinet «**NF-F – G.15.70.70.44U.1/0.06DC**» - is designed to accommodate telecommunications server equipment and various electrical equipment in a variety of outdoor conditions (with high rainfall and humidity, low/high temperature conditions). Cabinet have useful height 44U and DC air conditioner TAIC600 DC with cooling capacity 600W (L35/L35). Unique design and wide range of climate control solutions allows operating in harsh environments with a temperature range -40C - + 55C. This cabinet are simple in setup and installation.

Outdoor cabinet NF-F – G.15.70.70.44U.1/0.06DC benefits:

- **Cabinet dimensions 2208×700×700 H×W×D**
- **Useful depth 550 mm.**
- **Useful height of the cabinet 44 Unit.**
- **Front and rear vertical racks for equipment mounting.**
- **Anti-Vandal case.**
- **Type of walls – sandwich-panel, thickness of insulation – 50 mm.**

Material	▪ Frameless. ▪ Inner walls – galvanized steel, thickness 1 mm. ▪ Outer walls – galvanized steel, thickness 1,5 mm.
Door	▪ One door. ▪ Door opening angle — not more than 130°. ▪ Locking system — three-point (three-point locking system).
Coating	▪ Semi-textured outdoor powder-coat paint RAL 7035, 10 years warranty.
Temperature conditions	▪ -40°C to +55°C
Cooling system	▪ DC air conditioner TAIC600 DC with cooling capacity 600W (L35/L35).
Protection rating	▪ IP 55

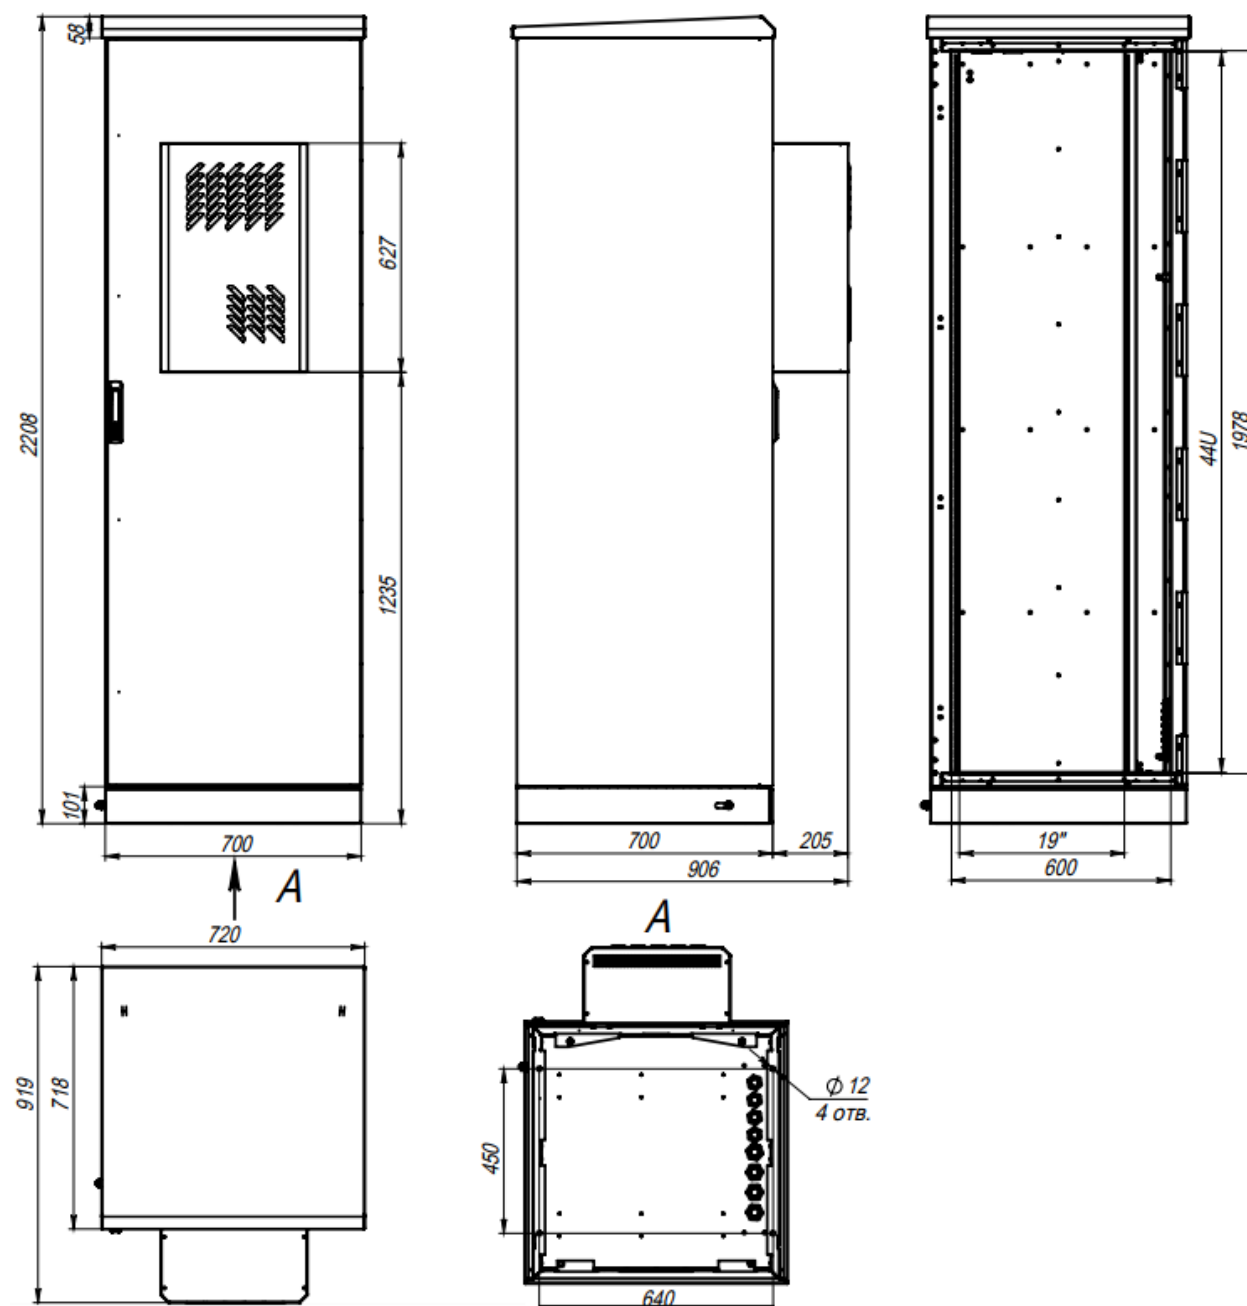

Total		
Dimensions, Height × Width × Depth	mm	2208×700×700
Degree of protection	IP	55
Voltage	V	230V 50-60 Hz/48V DC
Door	pcs	1
Lock	pcs	1
Socle	pcs	1
Roof	pcs	1
Insulation	Type	Mineral wool
Thickness of insulation	mm	50
Cooling system		
Air conditioner TAIC600 DC	pcs	1
Rated voltage	V	48 DC
Current	A	5
Cooling capacity	W	600 (L35/L35)
Noise level 1/2/3 m	dB	60/58/56
Equipment		
19" rail for power supply and customer's equipment	set	1
MCB 16A 1P	pcs	1
MCB 2A 1P	pcs	2
Converter 48/12V	pcs	1
Door open sensor	pcs	1
Service light 48VDC with door switch	pcs	1
Smoke detector	pcs	1
Grounding bus bar (copper)	pcs	1
Cable entries from bottom	Type x pcs	PG21 x 4 PG25 x 4
Other information		
Application	-	Outdoor
Mounting Method	-	Floor

teco

📍 Zaliutynska Str., 10, Kharkiv, Ukraine, 61177

☎ tel. +38 (057) 341-45-41
tel. +38 (057) 372-10-42
fax +38 (057) 341-60-30

🌐 teco-ua.com

✉ info@teco-ua.com