




teco

PRODUCT DESCRIPTION

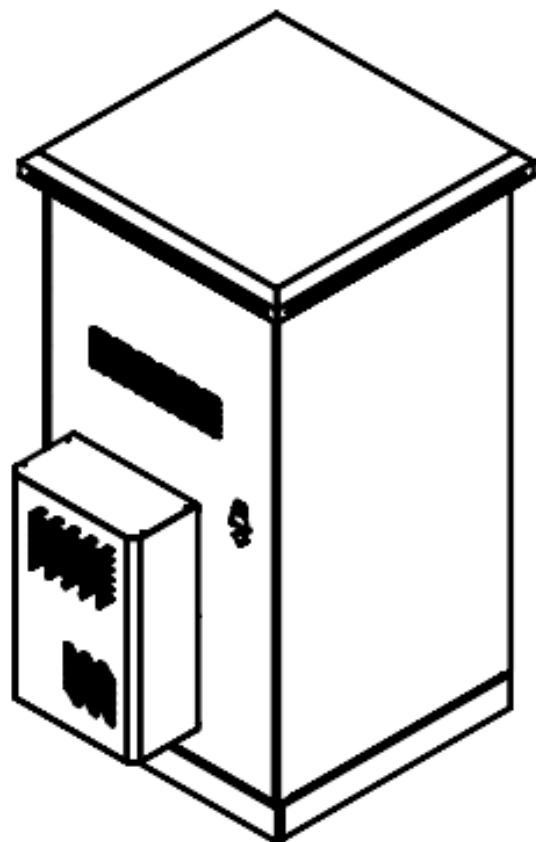

**OUTDOOR
FLOOR STANDING
CABINET**

Model: **NF-F – G.15.75.75.30U.2/2.640VeDC/06DC**

Art. **TEKO 1133.00.00.000**


TECO OUTDOOR FLOOR STANDING CABINET

Outdoor floor standing cabinet «**NF-F – G.15.75.75.30U.2/2.640VeDC/06DC**» - is universal cabinet with two compartment. Equipment tray with DC ventilation with air flow 640 m³/h and battery tray with DC air conditioner TAIC600 DC with cooling capacity 600W(L35/L35). Unique design and wide range of climate control solutions allows operating in harsh environments with a temperature range -40C - + 55C. This cabinet are simple in setup and installation.

Outdoor cabinet NF-F – G.15.75.75.30U.2/2.640VeDC/06DC benefits:

	▪ Cabinet dimensions 1555×750×750 H×W×D ▪ 10U front and rear vertical 19” racks for the equipment mounting. ▪ Battery shelves 16U (2 pcs × 8U) ▪ Type of walls – sandwich-panel, thickness of insulation – 50 mm. ▪ Anti-Vandal case.
Material	▪ Frameless. ▪ Inner walls – galvanized steel, thickness 1 mm. ▪ Outer walls – galvanized steel, thickness 1,5 mm.
Door	▪ One door. ▪ Door opening angle — not more 130°. ▪ Locking system — three-point.
Coating	▪ Semi-textured outdoor powder-coat paint RAL 7035, 10 years warranty.
Temperature conditions	▪ -40°C to +55°C.
Cooling system	▪ DC ventilation with air flow 640 m³/h ▪ DC air conditioner TAIC600 DC with cooling capacity 600W(L35/L35)
Protection rating	▪ IP 55.
Shipment method	Assembled

DIMENSIONS •

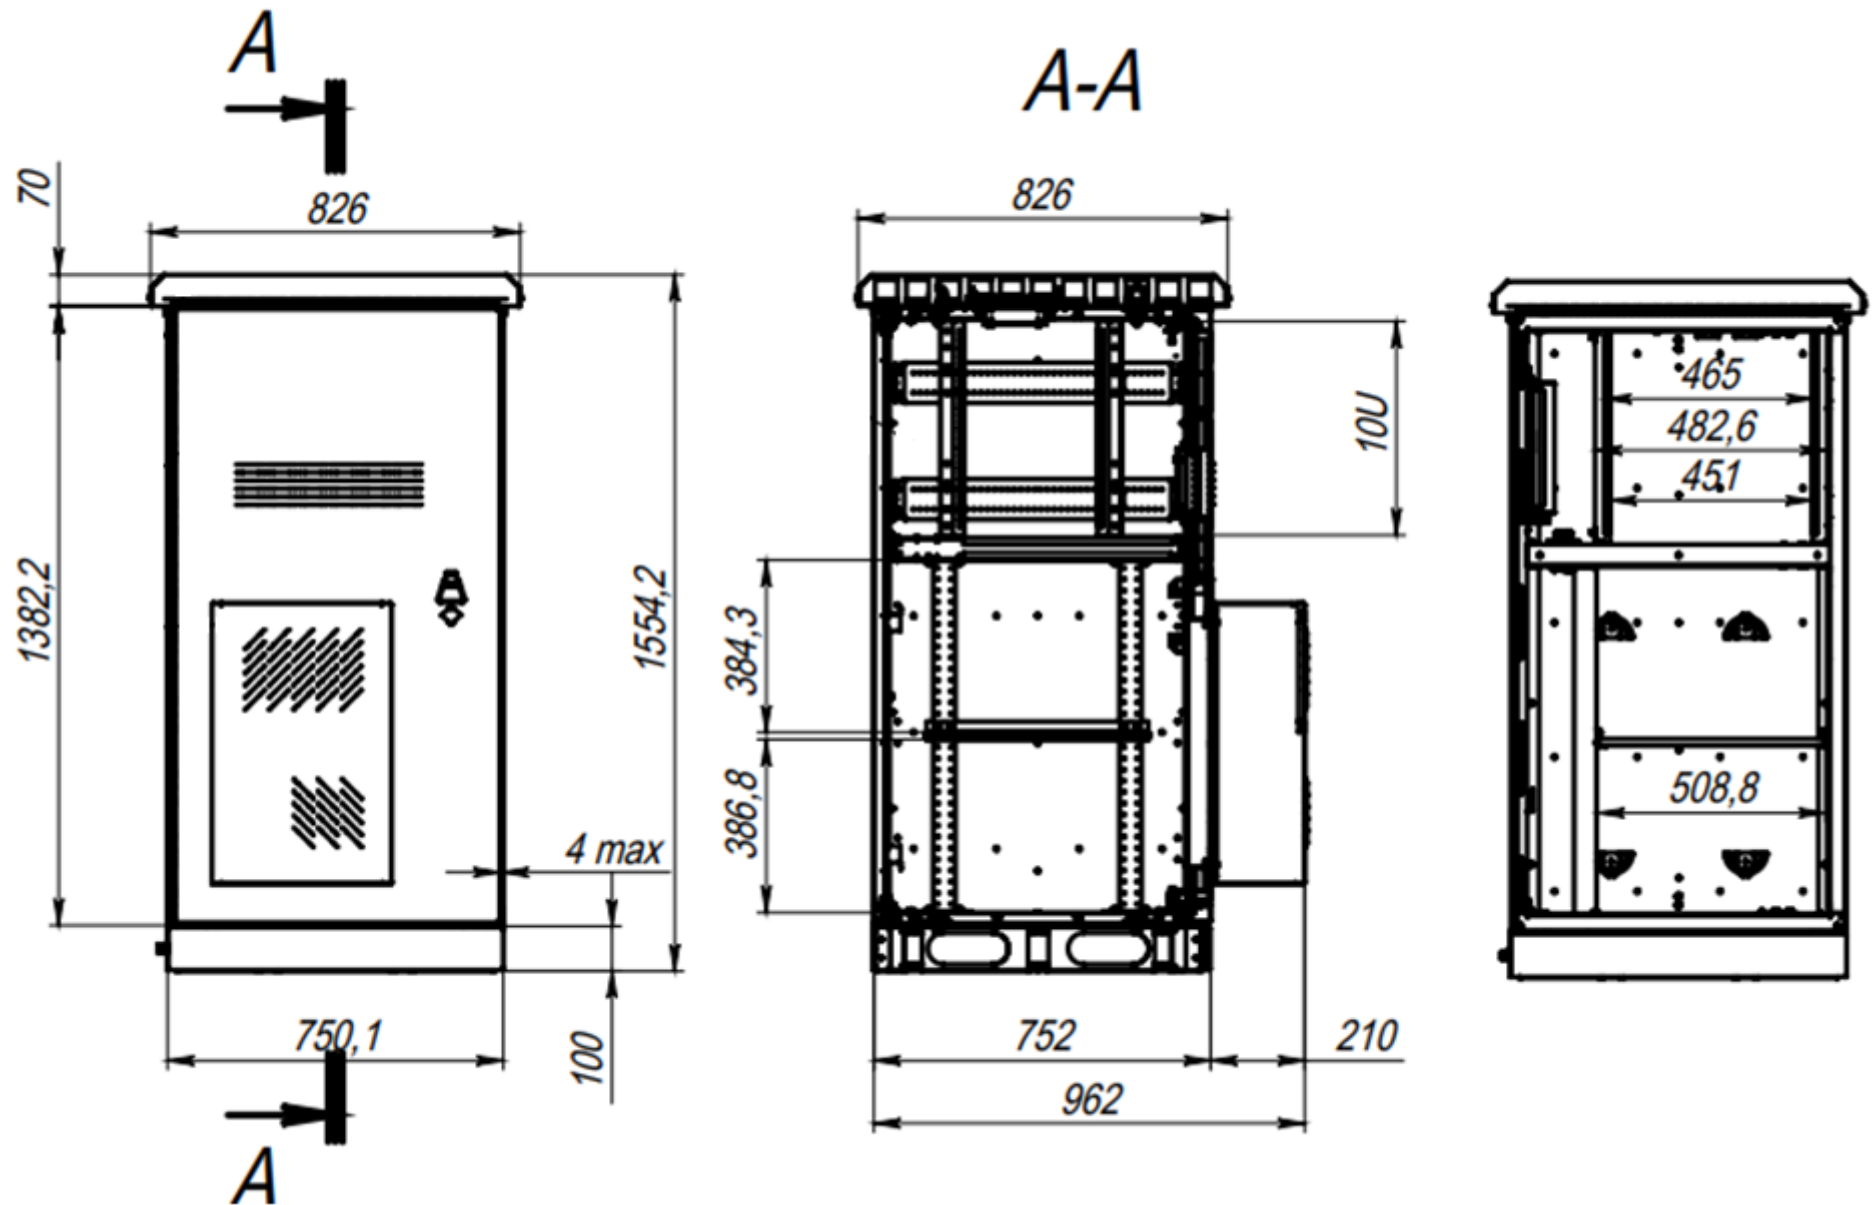

Total		
Dimensions, Height × Width × Depth	mm	1555×750×750
Degree of protection	IP	55
Voltage	V	220V AC 50-60 Hz/48V DC
Door	pcs	1
Lock	pcs	1
Socle	pcs	1
Roof	pcs	1
Insulation	Type	Mineral wool
Thickness of insulation	mm	50
Cooling system		
Ventilation 48VDC	set	1
Control unit	-	Controller DMC
Rated voltage	V	48 DC
Current	A	3,6
Air flow	m ³ /h	640
Air conditioner TAIC600 DC	pcs	1
Rated voltage	V	48 DC
Current	A	5
Cooling capacity	W	600 (L35/L35)
Noise level 1/2/3 m	dB	60/58/56

Equipment

19" rail for power supply and customer's equipment	set	1
MCB 25A 2P	pcs	1
MCB 16A 1P	pcs	1
MCB 6A 1P	pcs	1
MCB 2A 1P	pcs	1
RCD 16A, 30mA	pcs	1
Service socket 16A 220VAC	pcs	1
Controller DMC	pcs	1
Temperature sensor	pcs	1
Smoke detector	pcs	1
Battery shelf 8U	pcs	2
Cable entries from bottom	Type x pcs	1

Other information

Application	-	Outdoor
Mounting Method	-	Floor

teco

📍 Zaliutynska Str., 10, Kharkiv, Ukraine, 61177

☎ tel. +38 (057) 341-45-41
tel. +38 (057) 372-10-42
fax +38 (057) 341-60-30

🌐 teco-ua.com

✉ info@teco-ua.com