




teco

PRODUCT DESCRIPTION

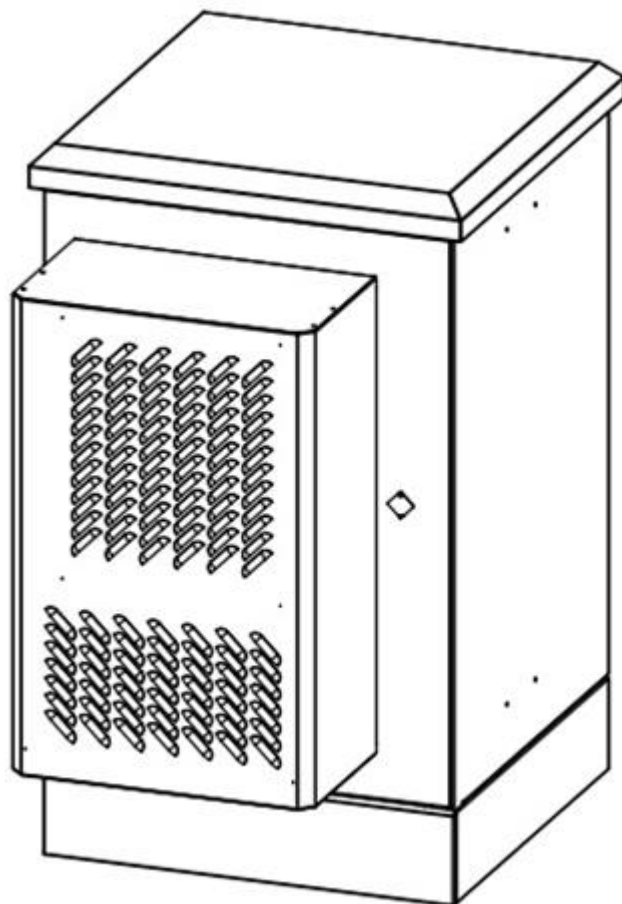

**OUTDOOR
FLOOR STANDING
CABINET**

Model: **NF-F – S.15.65.65.18U.1/0.15AC_DC**

Art. **TEKO 1124-1.00.00.000**


TECO OUTDOOR FLOOR STANDING CABINET

Outdoor floor standing cabinet «**NF-F – S.15.65.65.18U.1/0.15AC_DC**» - is designed to accommodate telecommunications server equipment and various electrical equipment in a variety of outdoor conditions (with high rainfall and humidity, low/high temperature conditions). Cabinet have useful height 18U and AC/DC air conditioner TAIC1500AC/DC with cooling capacity 1500W (L35/L35). Unique design and wide range of climate control solutions allows operating in harsh environments with a temperature range -40C - + 55C. This cabinet are simple in setup and installation.

Outdoor cabinet NF-F – S.15.65.65.18U.1/0.15AC_DC benefits:

- **Cabinet dimensions 1116×650×650 H×W×D**
- **Useful height of the cabinet 18 Unit.**
- **Front vertical racks for equipment mounting.**
- **Anti-Vandal case.**
- **Type of walls – sandwich-panel, thickness of insulation – 50 mm.**

Material	▪ Frameless. ▪ Inner walls – galvanized steel, thickness 1 mm. ▪ Outer walls – steel, thickness 1,5 mm.
Door	▪ One door. ▪ Door opening angle — not more than 130°. ▪ Locking system — three-point (three-point locking system).
Coating	▪ Semi-textured outdoor powder-coat paint RAL 7035, 10 years warranty.
Temperature conditions	▪ -40°C to +55°C
Cooling system	▪ AC/DC air conditioner TAIC1500AC/DC with cooling capacity 1500W (L35/L35).
Protection rating	▪ IP 55

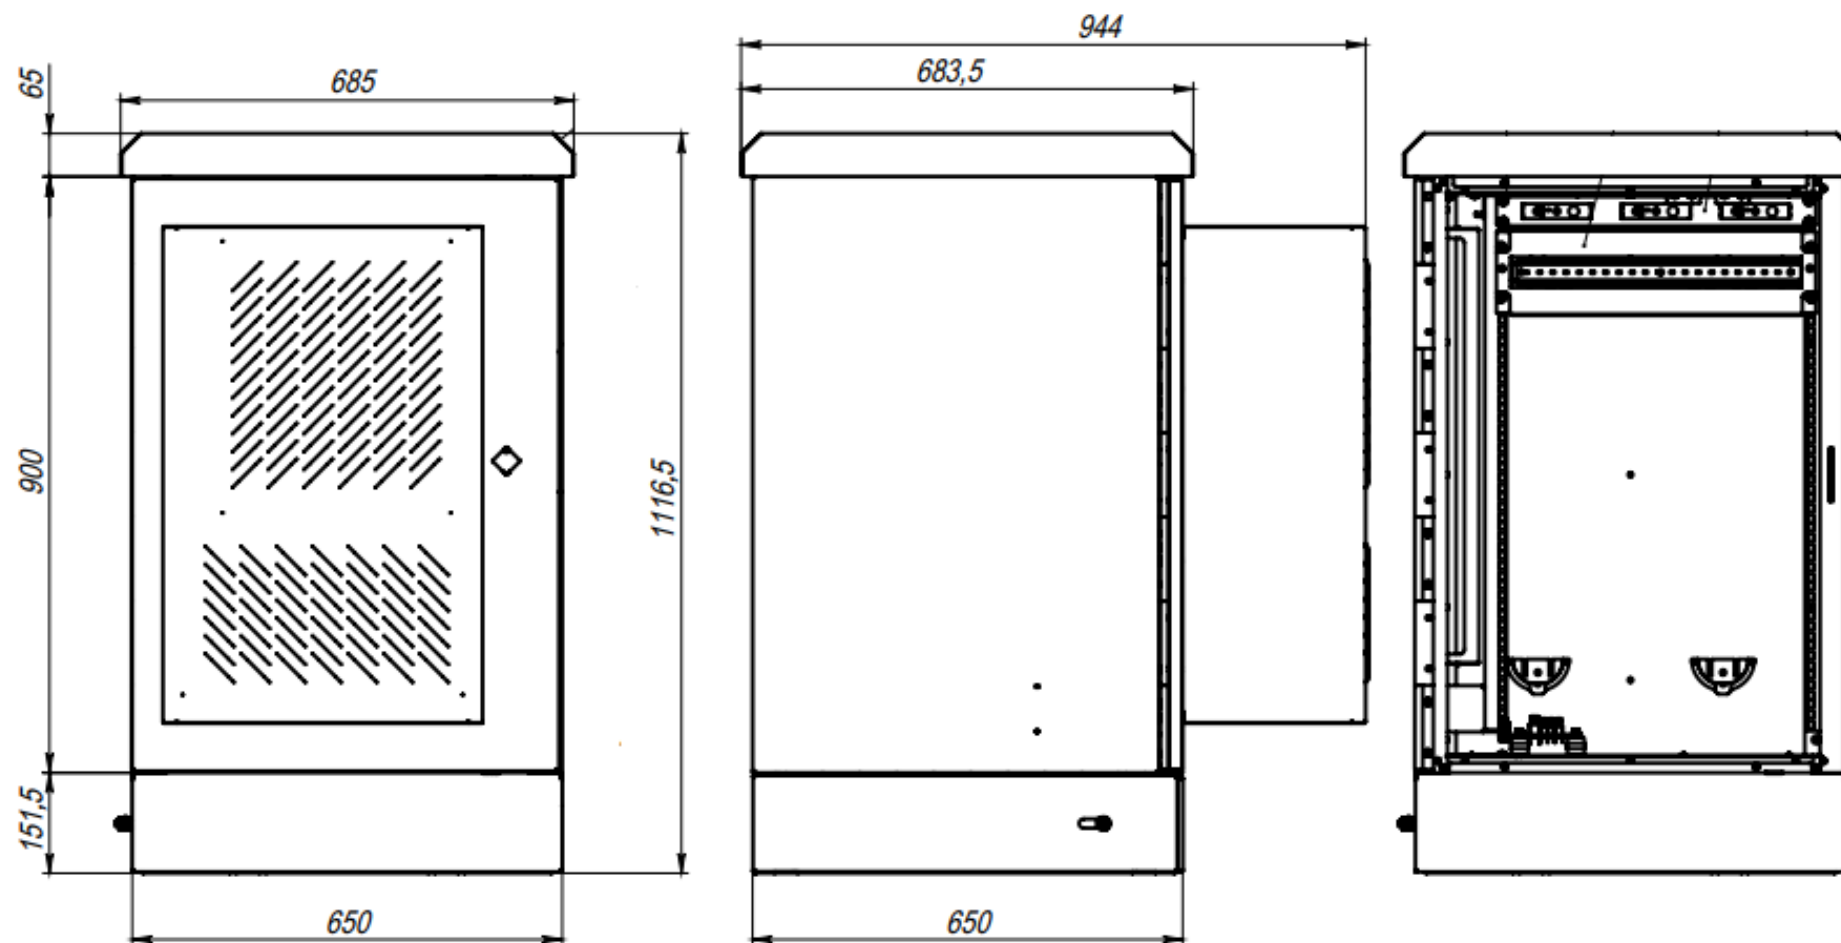

Total		
Dimensions, Height × Width × Depth	mm	1116×650×650
Degree of protection	IP	55
Voltage	V	220V 50-60 Hz/48V DC
Door	pcs	1
Lock	pcs	1
Socle	pcs	1
Roof	pcs	1
Insulation	Type	Mineral wool
Thickness of insulation	mm	50
Cooling system		
Air conditioner TAIC1500AC/DC	pcs	1
Rated voltage	V	220V 50-60 Hz/48V DC
Current	A	2,5
Cooling capacity	W	1500 (L35/L35)
Noise level 1/2/3 m	dB	61/59/58
Equipment		
19" rail for power supply and customer's equipment	set	1
SPD class II 4P	pcs	1
MCB 32A 3P	pcs	1
MCB 10A 1P	pcs	1
MCB 6A 1P	pcs	1
MCB 2A 1P	pcs	2
RCD 16A, 30mA	pcs	1
Service socket 16A	pcs	1
Controller DMC	pcs	1
Temperature sensor	pcs	1
Door open sensor	pcs	1
Service light 48VDC with door switch	pcs	1
Smoke detector	pcs	1
Flood detector	pcs	1
Grounding bus bar (copper)	pcs	1
		25 x 2
Cable entries from bottom	Size (mm) x pcs	32 x 11
		40 x 9
Other information		
Application	-	Outdoor
Mounting Method	-	Floor

teco

📍 Zaliutynska Str., 10, Kharkiv, Ukraine, 61177

☎ tel. +38 (057) 341-45-41
tel. +38 (057) 372-10-42
fax +38 (057) 341-60-30

🌐 teco-ua.com

✉ info@teco-ua.com